

## swarm bee ER Module

### Embedded Ultra Wide Band Radio

### Location Awareness and Concurrent Wireless Communication

#### Overview

swarm bee location sensors are highly integrated wireless modules and deliver precise location information in real-time. Concurrent wireless data communication makes it easy to coordinate a swarm of independent radio nodes. The Ultra-Wide Band (UWB) version called swarm bee ER serves applications for very precise and reliable distance or location information between 0 and 50 meter. The module utilizes the same comprehensive swarm API (Application Programming Interface) as all other swarm bee products. Main features include:

- Integrated API**  
 The integrated firmware swarm API enables customers to speed up development and get the products to market quickly.
- Ranging & Communication**  
 Autonomous swarm bee ER radio modules are able to measure the distance between them using time-of-flight (TOF) technology. At the same time they send out broadcast packets (blinks) advertising their ID. These blinks can be located in nanotron's time-difference-of-arrival (TDOA) location framework. The module support concurrent data communication.
- Movement & Temperature Detection**  
 The on-board MEMS sensor detects 3D acceleration and temperature changes. The sensor is controlled by the swarm API.
- Enhanced Resolution (ER)**  
 In the product name the suffix ER stands for Enhanced Resolution and signifies Micro-Location with UWB achieving 10 cm location accuracy.

#### Key Features

Key Frequency Bands .....	6 bands with fc from 3.5 to 6.5 GHz
Data Rates .....	110 Kbps, 850 Kbps, 6.8 Mbps
Packet Size .....	up to 1023 Bytes
ToA resolution .....	< 20 ps (better than 4 mm)
Ranging distance .....	50 m
RF output power.....	-14 or -10 dBm
Transmit power density .....	< -41.3 dBm / MHz
RF sensitivity @ 110 Kbps .....	-97 dBm typ.*
RF sensitivity @ 6.8 Mbps .....	-86 dBm typ.*
RF interface .....	50 Ohm RF Port
Host interface (UART) .....	115 kbps ~ 2 Mbps
Supply voltage.....	3.3 V ~ 5.5 V
Active current consumption TX .....	max. 90 mA
Active current consumption RX .....	max. 150 mA
Current consumption in standby mode.....	6.5 mA (CPU stopped, all peripherals on)
Current consumption in snooze mode.....	max. 7 µA (Autonomous mode enabled, all peripherals off)
Current consumption in nap mode .....	max. 20 µA* (CPU stopped, GPIO off, UART off, MEMS alert)
Current consumption in nap mode .....	max. 500 µA (CPU stopped, GPIO alert, UART off, MEMS off)
Current consumption in deep-sleep mode.....	≤ 1 µA (module completely disabled)
Operating temperature range .....	-30°C to +85°C
Dimensions .....	40 mm x 24 mm x 3.5 mm
Weight.....	7 g

\* mode dependent

## swarm API

The common *swarm* API supports three protocols: ASCII and BINARY on the host interface and AIR for controlling the module over the air. The ability of the module to be configured over the air allows for entirely autonomous operation even stand-alone without a host controller.

## Power Supply & Power Management

A single 3.3 V supply voltage is required to operate the radio. Supply voltage tolerances allow for direct connection to a 3.6 V LiPo battery or 5 V USB.

The *swarm* bee ER radio can go to sleep and only wake up periodically. The underlying power management concept enables the cooperation between the radios even if they sleep most of the time.

## Module Dimension & Pin Assignment

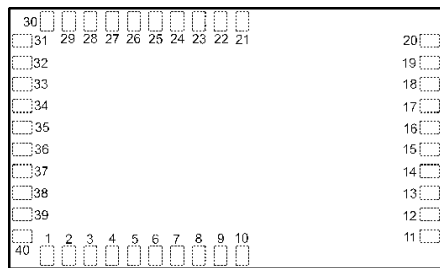


Figure 1 *swarm* bee ER Module – Top View

## Pin Description

Pin No.	Pin Name	Pin No.	Pin Name
1,5,7,9,23,28,31-33,37-40	Reserved	25	DIO_0
2	VIN	26	DIO_1
3,10,12,14-22	GND	27	DIO_2
4	A_MODE	29	UART_TX
6	MOD_EN	30	UART_RX
8	+3.3V	34	DIO_3
13	RF_PORT	35	TX_ON
24	ADC_IN	36	DIV_COEX

## Applications

The *swarm* bee ER module targets the market for autonomous smart items. Specifically it is going to serve applications for very precise and reliable distance or location information between 0 and 50 Meter. This is required for exclusion zone applications improving operator safety in underground mines and harsh industrial environments. The module serves as a hardware platform for tags

and sensors and can be operated stand-alone for lowest possible cost or with an external host controller for additional item intelligence.

## DK Plus

*swarm* bee ER Development Kit Plus (“DK Plus” for short) is a useful tool for users to get quick acquaintance with the basic functionality of *swarm* bee ER. The DK Plus consists of several DK Plus Boards (see figure below) with antenna and *swarm* PC Tool which demonstrates ranging application, sensor monitor etc.



Figure 2 *swarm* bee ER DK Plus Board

## Ordering Information

Order No.	Description
MN01SWBER	<i>swarm</i> bee ER
BN01SWBEP	<i>swarm</i> bee ER DK Plus Board incl. antenna

## Sales Inquiries

nanotron Technologies GmbH  
 Alt-Moabit 60a  
 10555 Berlin, Germany

Europe/Asia/Africa: +49 (30) 399954-0

USA/Americas/Pacific: +1 (339) 999-2994

Email: [nanotronsales@inpixon.com](mailto:nanotronsales@inpixon.com)

Web: [www.nanotron.com](http://www.nanotron.com), [www.inpixon.com](http://www.inpixon.com)

## About nanotron, An Inpixon Company

Nanotron Technologies GmbH, an Inpixon company (Nasdaq: INPX) is a leading provider of electronic location awareness solutions. If knowing what, where and when is mission-critical to your business, rely on nanotron with Location Running.

Nanotron’s solutions deliver precise position data augmented by context information in real-time. Location Running means, reliably offering improved safety and increased productivity, 24 hours a day, 7 days per week: Location-Awareness for the Internet of Things (IoT).